


Computer "denken" digital

145

³⁴
233

000101101110110...

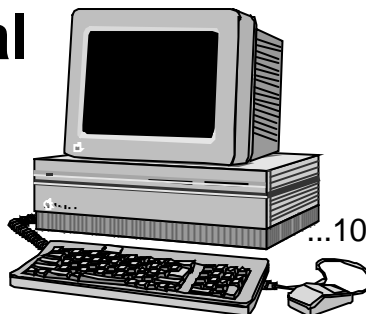

...10011010

89
95147
301

Wandle ins Zehnersystem um.
Führende Nullen kannst du ignorieren.

Wandle ins Zweiersystem um

1.	1 1 0 1 0 0 0 1	₂	=	
2.	1 1 1 0 1 1 1 0	₂	=	
3.	0 1 1 1 0 0 1 1	₂	=	
4.	1 1 0 0 0 0 0 0	₂	=	
5.	0 1 0 0 1 1 1 1	₂	=	
6.	0 0 0 1 0 0 0 0	₂	=	
7.	0 1 1 1 1 1 1 0	₂	=	
8.	1 1 0 0 1 1 1 0	₂	=	
9.	1 0 0 0 0 0 0 0	₂	=	
10.	0 0 0 1 0 0 0 0	₂	=	
11.	1 1 0 0 1 0 0 0	₂	=	
12.	0 0 0 0 0 1 1 0	₂	=	
13.	1 0 1 0 0 1 0 0	₂	=	
14.	0 0 1 0 1 1 1 0	₂	=	
15.	1 0 0 1 0 1 0 0	₂	=	
16.	1 1 1 1 0 1 0 0	₂	=	
17.	0 1 0 1 0 1 1 0	₂	=	
18.	0 0 0 1 0 0 0 1	₂	=	
19.	0 0 0 1 0 0 0 1	₂	=	
20.	1 1 1 0 1 1 0 1	₂	=	
21.	0 0 1 1 0 1 0 1	₂	=	
22.	1 1 1 1 0 0 0 1	₂	=	
23.	1 0 0 1 0 1 0 0	₂	=	
24.	0 1 1 1 0 0 1 0	₂	=	
25.	1 0 0 0 1 1 0 1	₂	=	
26.	0 1 0 0 1 0 0 0	₂	=	
27.	1 0 0 0 0 1 1 0	₂	=	
28.	0 1 1 0 0 0 1 0	₂	=	
29.	0 0 0 0 0 1 0 1	₂	=	
30.	1 1 0 1 1 1 1 0	₂	=	
31.	1 1 1 1 0 0 1 1	₂	=	
32.	0 1 0 0 1 1 1 1	₂	=	


33.	149	=	
34.	193	=	
35.	146	=	
36.	242	=	
37.	180	=	
38.	94	=	
39.	16	=	
40.	130	=	
41.	177	=	
42.	157	=	
43.	108	=	
44.	123	=	
45.	20	=	
46.	56	=	
47.	151	=	
48.	214	=	
49.	86	=	
50.	189	=	
51.	65	=	
52.	78	=	
53.	80	=	
54.	67	=	
55.	13	=	
56.	66	=	
57.	213	=	
58.	161	=	
59.	30	=	
60.	53	=	
61.	250	=	
62.	79	=	
63.	224	=	
64.	144	=	

Computer "denken" digital

145

233³⁴

000101101110110...

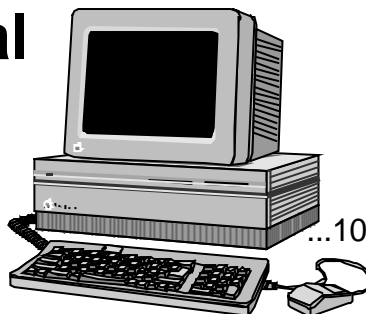

...10011010

89

95147
307

Wandle ins Zehnersystem um.
Führende Nullen kannst du ignorieren.

Wandle ins Zweiersystem um

1.	1 1 0 1 0 0 0 1 ₂	=	209
2.	1 1 1 0 1 1 1 0 ₂	=	238
3.	0 1 1 1 0 0 1 1 ₂	=	115
4.	1 1 0 0 0 0 0 0 ₂	=	192
5.	0 1 0 0 1 1 1 1 ₂	=	79
6.	0 0 0 1 0 0 0 0 ₂	=	16
7.	0 1 1 1 1 1 1 0 ₂	=	126
8.	1 1 0 0 1 1 1 0 ₂	=	206
9.	1 0 0 0 0 0 0 0 ₂	=	128
10.	0 0 0 1 0 0 0 0 ₂	=	16
11.	1 1 0 0 1 0 0 0 ₂	=	200
12.	0 0 0 0 0 1 1 0 ₂	=	6
13.	1 0 1 0 0 1 0 0 ₂	=	164
14.	0 0 1 0 1 1 1 0 ₂	=	46
15.	1 0 0 1 0 1 0 0 ₂	=	148
16.	1 1 1 1 0 1 0 0 ₂	=	244
17.	0 1 0 1 0 1 1 0 ₂	=	86
18.	0 0 0 1 0 0 0 1 ₂	=	17
19.	0 0 0 1 0 0 0 1 ₂	=	17
20.	1 1 1 0 1 1 0 1 ₂	=	237
21.	0 0 1 1 0 1 0 1 ₂	=	53
22.	1 1 1 1 0 0 0 1 ₂	=	241
23.	1 0 0 1 0 1 0 0 ₂	=	148
24.	0 1 1 1 0 0 1 0 ₂	=	114
25.	1 0 0 0 1 1 0 1 ₂	=	141
26.	0 1 0 0 1 0 0 0 ₂	=	72
27.	1 0 0 0 0 1 1 0 ₂	=	134
28.	0 1 1 0 0 0 1 0 ₂	=	98
29.	0 0 0 0 0 1 0 1 ₂	=	5
30.	1 1 0 1 1 1 1 0 ₂	=	222
31.	1 1 1 1 0 0 1 1 ₂	=	243
32.	0 1 0 0 1 1 1 1 ₂	=	79

33.	149	=	1 0 0 1 0 1 0 1 ₂
34.	193	=	1 1 0 0 0 0 0 1 ₂
35.	146	=	1 0 0 1 0 0 1 0 ₂
36.	242	=	1 1 1 1 0 0 1 0 ₂
37.	180	=	1 0 1 1 0 1 0 0 ₂
38.	94	=	0 1 0 1 1 1 1 0 ₂
39.	16	=	0 0 0 1 0 0 0 0 ₂
40.	130	=	1 0 0 0 0 0 1 0 ₂
41.	177	=	1 0 1 1 0 0 0 1 ₂
42.	157	=	1 0 0 1 1 1 0 1 ₂
43.	108	=	0 1 1 0 1 1 0 0 ₂
44.	123	=	0 1 1 1 1 0 1 1 ₂
45.	20	=	0 0 0 1 0 1 0 0 ₂
46.	56	=	0 0 1 1 1 0 0 0 ₂
47.	151	=	1 0 0 1 0 1 1 1 ₂
48.	214	=	1 1 0 1 0 1 1 0 ₂
49.	86	=	0 1 0 1 0 1 1 0 ₂
50.	189	=	1 0 1 1 1 1 0 1 ₂
51.	65	=	0 1 0 0 0 0 0 1 ₂
52.	78	=	0 1 0 0 1 1 1 0 ₂
53.	80	=	0 1 0 1 0 0 0 0 ₂
54.	67	=	0 1 0 0 0 0 1 1 ₂
55.	13	=	0 0 0 0 1 1 0 1 ₂
56.	66	=	0 1 0 0 0 0 1 0 ₂
57.	213	=	1 1 0 1 0 1 0 1 ₂
58.	161	=	1 0 1 0 0 0 0 1 ₂
59.	30	=	0 0 0 1 1 1 1 0 ₂
60.	53	=	0 0 1 1 0 1 0 1 ₂
61.	250	=	1 1 1 1 1 0 1 0 ₂
62.	79	=	0 1 0 0 1 1 1 1 ₂
63.	224	=	1 1 1 0 0 0 0 0 ₂
64.	144	=	1 0 0 1 0 0 0 0 ₂